

ROUND 100-1000

Round 100-1000 LED downlight provides higher efficacy and longer life than the traditional 18W CFL downlight with the beautiful light quality.

Features

- High power efficacy
- Long life span
- Sophisticated diffuser

Benefits

- Up to 44% cost savings in energy consumptions*
- Minimal glare without any noticeable hot spot
- Up to 35,000 operation hours, reducing maintenance cost






*Compared with 18W CFL downlight operated with magnetic driver


Applications

Office lighting, shop lighting, corridor lighting and kitchen lighting

Dimensions

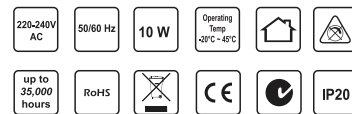

Photometric Diagram

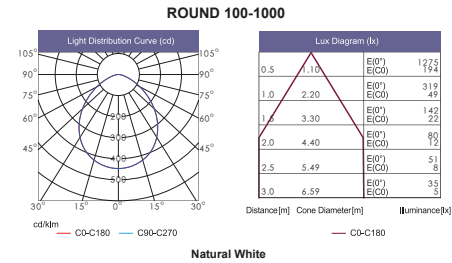

Specifications

Product Name	Part No.	Color	Color Temp (CCT)	Color Rendering Index (CRI)	Input Voltage	Rated Current	Rated Frequency	Rated Luminous Flux	Rated Power
ROUND 100-1000 LED Downlight	2085270011	Warm White	2700K	80Ra	220 - 240V AC	45 mA	50/60 Hz	750 lm	10 W
	2085300011	Bright White	3000K					750 lm	
	2085400011	Natural White	4000K					900 lm	
	2085650011	Daylight	6500K					900 lm	
Rated Efficacy	Beam Angle	Life Span	Operating Temperature	Storage Temperature	Application	Dimmable	RoHS	JP Rating	
75 lm/W	90°	35,000 hrs	-20°C ~ +45°C	-20°C ~ +55°C	Indoor	No	Yes	IP20	
75 lm/W									
90 lm/W									
90 lm/W									

Material

Housing	Housing Color
Plastic+Aluminum	White